



**A.D. PRODUZIONE SRL**

+39 02 33 50 24 97  
info@adproduzione.it  
www.adproduzione.com

**EXTRACTION INTERIORS CLEANER mod. LI-SE**

Unite of measure: cm


# EXAMPLE OF MASONRY WORKS

FOR TECHNICAL DETAILS ASK TO A PROFESSIONAL TECHNICIAN

## CAUTION

- Interventions to be checked in accordance with geotechnical conditions of soil.
- Electrical connections made during installation must ensure the regulations in force.
- Installed power: 2,2 kW.
- Electrical cables must not be twisted, overlapping and rubbing against sharpe edge.
- All the extremities of the tubes must stick out by 20 cm.

--- MACHINE MAIN DIMENSIONS

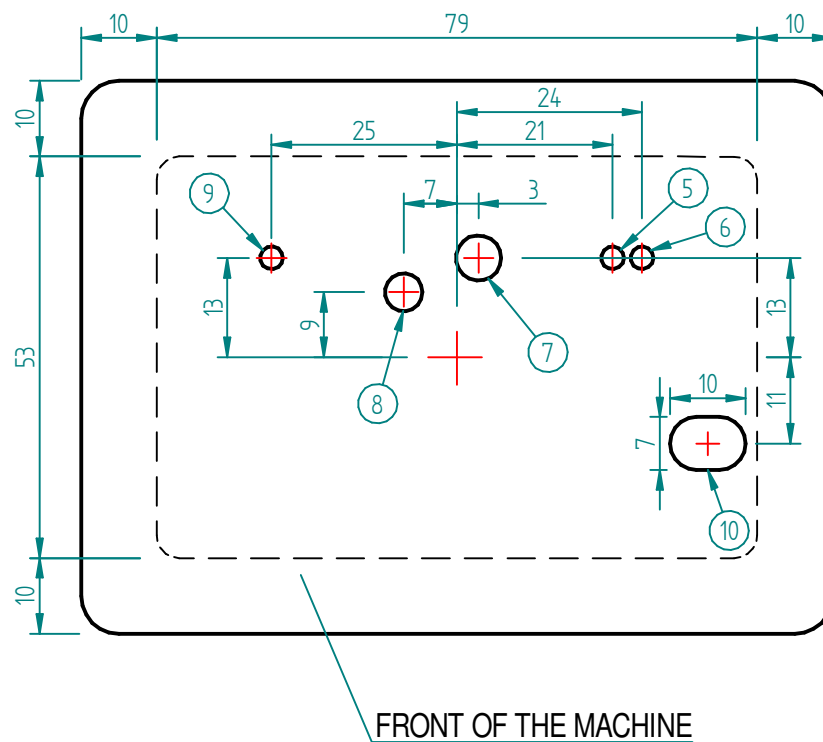

- 1) Washed sand
- 2) Lean concrete with 10 cm thickness with 5 mm diameter welded mesh
- 3) Walkable floor - Flooring as per your forecourt
- 4) cls r' ck 250 kg/cm<sup>2</sup>
- 5) Grounding obligation - Ground connection point of the structure (the cord must come out by 1 m from the flooring)
- 6) 50 mm diameter p.v.c. hose for passing the 3P+N+T type electric cable section 2,5 mm (the cable must come out at least 2 meters out of the flooring to allow the electrical connection)
- 7) 60 mm diameter water exhaust p.v.c. tube (preparing tube slope to help water drainage)
- 8) 1/2" tube with gate valve - incoming water with min. pressure 3 bar
- 9) Predisposition for eventual arrival of compressed air (from outside)
- 10) Predisposition for eventual centralized vacuum system for tokens

