
EXAMPLE OF MASONRY WORKS


FOR TECHNICAL DETAILS ASK TO A **PROFESSIONAL TECHNICIAN**




TYRE INFLATOR - mod. GGIPO80 - GGIPO160

Unite of measure: cm

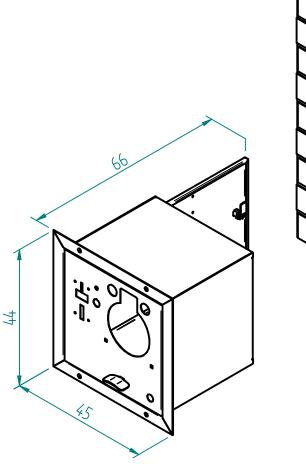

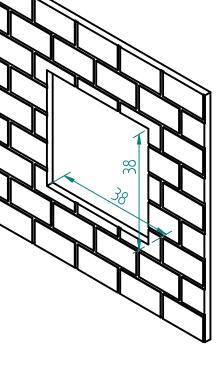


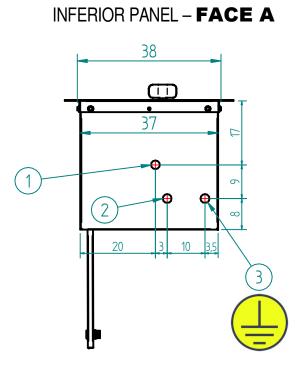


1) Ø 23 mm hole for the passage of the compressed air hose


of the electrical wire P+N+T section 2,5 mm

3) \emptyset 23 mm hole for the passage of the grounding obligation wire -Ground connection point of the structure.





conditions.

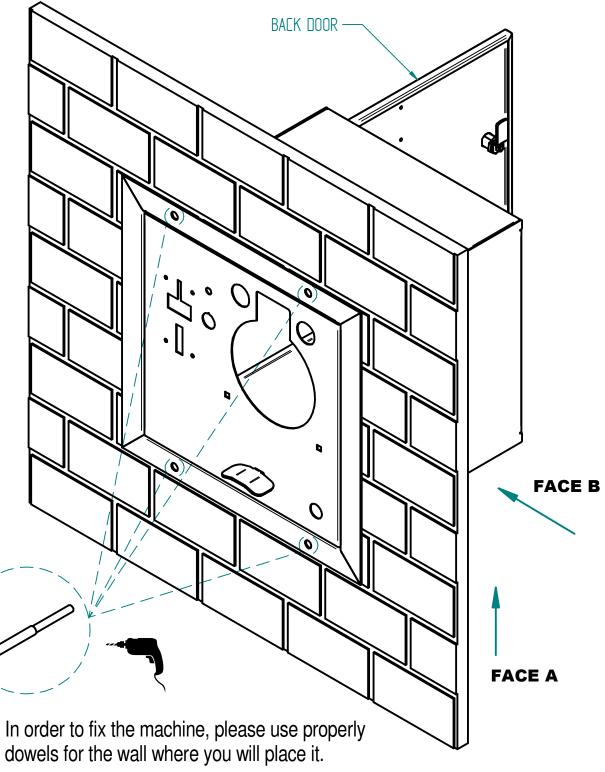

CAUTION

- Interventions to be checked in accordance with the wall
- Electrical connections made during installation must ensure the regulations in force.
- -Installed power: 500 W (230 V).
- Electrical cables must not be twisted, overlapping and rubbing against sharpe edge.