



A.D. PRODUZIONE SRL

+39 02 33 50 24 97

info@adproduzione.it

www.adproduzione.com

**EXTRACTION INTERIORS CLEANER+
VENDING DISPENSER mod. LIS-SV48**

Unità di misura: cm

EXAMPLE OF MASONRY WORKS


FOR TECHNICAL DETAILS ASK TO A
PROFESSIONAL TECHNICIAN

- 1) Washed sand
- 2) Lean concrete with 10 cm thickness with 5 mm diametre welded mesh
- 3) Walkable floor - Flooring as per your forecourt
- 4) cls r' ck 250 kg/cm²
- 5) Grounding obligation - Ground connection point of the structure (the cord must come out by 1 m from the flooring)
- 6) 50 mm diameter p.v.c. hose for passing the 3P+N+T type electric cable section 2,5 mm (the cable must come out at least 2 meters out of the flooring to allow the electrical connection)
- 7) Predisposition for eventual arrival of compressed air (from outside)
- 8) Predisposition for eventual centralized vacuum system for tokens
- 9) Free exit



CAUTION

- Interventions to be checked in accordance with geotechnical conditions of soil.
- Electrical connections made during installation must ensure the regulations in force.
- Installed power: 2,2 kW.
- Electrical cables must not be twisted, overlapping and rubbing against sharpe edge.
- All the extremities of the tubes must stick out by 20 cm.

— — MACHINE MAIN DIMENSIONS

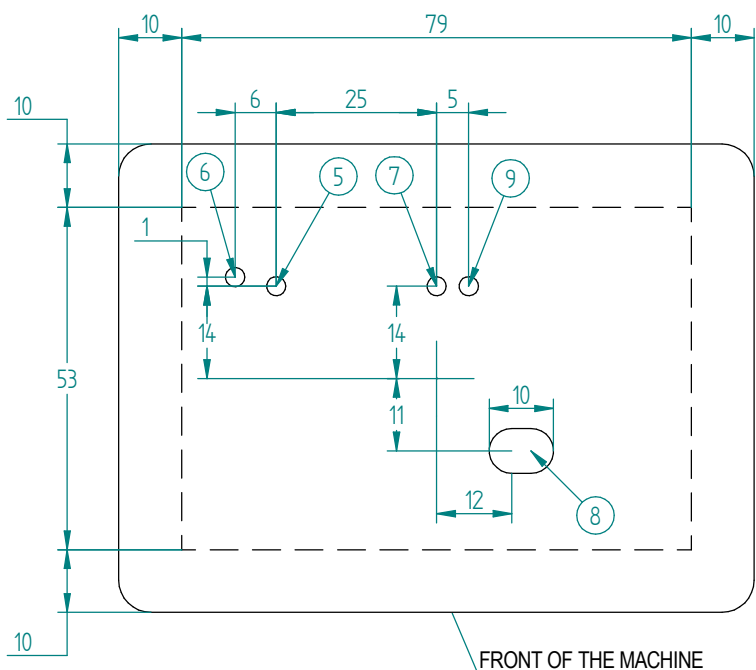

FRONT OF THE MACHINE

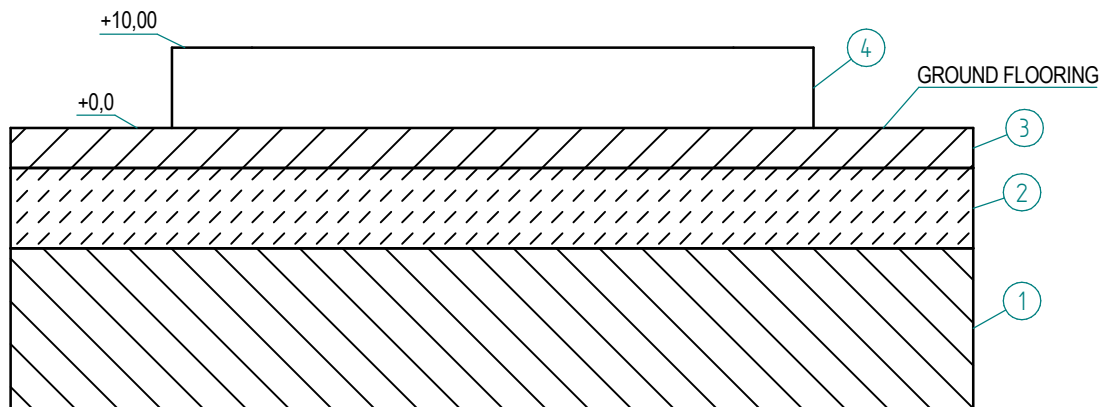

5

